


7.3 Meter Earth Station Antenna



General Description

The 7.3-meter antenna delivers exceptional performance for transmit/receive and receive only applications for L through Ka-band frequencies. This antenna offers a reflector design that incorporates precision-formed panels, truss radials and hub assembly using matched tooling for interchangeable components. It features an innovative Cassegrain or Ring Focus feed and sub-reflector design which results in high gain, low noise temperature, high antenna efficiency and excellent rejection of noise and microwave interference. A large center hub provides spacious accommodation for equipment mounting. The reflector is supported by a galvanized elevation over azimuth kingpost pedestal that provides the required stiffness for pointing and tracking accuracy. The pedestals are designed for full orbital arc coverage and are readily adaptable to ground or rooftop installations.

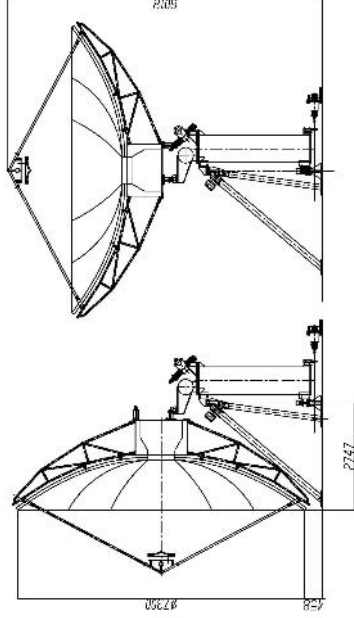

Highlighted Features:

- *Precisely adjusted before leaving factory, and no need theodolite to adjust the panel accuracy;
 - *Meets CCIR 580 and INTELSAT Requirements
 - *High precision alloy aluminum main reflector. Hot spray galvanized with white paint
 - *CP/LP switchable feed
 - *High RF performance
 - *Galvanized stainless steel hardware
 - *Different frequency ranges from many feed configurations
 - *Ka band antenna with rotary pedestal is available
- A large hub for install RF equipments
- *Multi-layer anti-corrosion treatment.

Options

- *L, S, X, Ka bands and multi-bands
- *Customer feed system design
- *800MHz Extended C band is available
- *Full motion antenna
- *Feed blower or deicing sub-system with automatic controls
- *Two or four Tx/Rx port in linear or circular polarized feeds
- *Antenna control system with tracking
- ODU Support Kits
- *Increase the surface spray zinc thickness along seaside.

Antenna Accessory

- Motorization Kits
- Limit Switches
- Factory Feed System Testing and Documentation
- Ocean /Air Transport Packing
- Foundation Kit
- Grounding Kit Cable-Mounting Kit

Technical Specification

Electrical Specification										
Type	MA73T		MB73T		MC73T		MD73T		MES73T	
Operating Frequency, GHz	Standard C band		Extended C band		Insat C band		Ku Band		DBS Band	
	Receive	Transmit	Receive	Transmit	Receive	Transmit	Receive	Transmit	Receive	
Typical Frequency, GHz	3.625~4.2	5.85~6.425	3.4~4.2	5.85~6.725	4.5~4.8	6.725~7.025	10.70~12.75	13.75~14.5	10.70~12.75	17.3~18.4
Typical Gain, Mid-band, dBi	47.6	51.5	47.3	51.8	49.1	52.5	56.8	58.4	56.8	60.3
Polarization	Linear/circular		Linear/circular		Linear/circular		Linear		linear	
XPD (on Axis), dB (Linear)	35	35	35	35	35	35	35	35	35	35
XPD across 1dB Beam Width, dB (Linear)	30	30	30	30	30	30	30	30	30	30
Axis Ratio, dB (Circular)	0.5	0.5	0.5	0.5	0.5	0.5	/	/	/	/
VSWR	1.25	1.25	1.30	1.30	1.25	1.25	1.30	1.30	1.30	1.30
Antenna Noise Temperature (4 Port Feed)	45K		46K		47K		75K		73K	
10° Elevation	38K		41K		42K		64K		62K	
30° Elevation	35K		39K		40K		60K		59K	
50° Elevation										
-3 dB Beam Width, Mid-band	0.68°	0.43°	0.70°	0.42°	0.57°	0.39°	0.24°	0.16°	0.24°	0.16°
Typical G/T (EL=10°)	28.8dB/K (30K LNA)		28.5dB/K (30K LNA)		30.2dB/K (30K LNA)		35.2dB/K (70K LNA)		35.2dB/K (70K LNA)	
Tx. Total Power Capability, KW	5	5	5	5	5	5	5	2	2	2
Feed Interface	CPR229F	CPR137F	CPR229F	CPR137F	CPR229F	CPR137F	WR-75	WR-75	WR-75	WR-62
Feed Insertion Loss, dB	0.4	0.3	0.4	0.3	0.4	0.3	0.5	0.4	0.5	0.5
Isolation, Tx to Rx, dB	85	85	85	85	85	85	85	85	85	85
Tx/Tx, Rx/Rx, dB (Linear)	30	30	30	30	30	30	30	30	30	30
Tx/Tx, Rx/Rx, dB (Circular)	20	20	20	20	20	20	20	20	20	20
Sidelobe	CCIR 580-5									
Mechanical Specification										
Antenna Diameter	7.3m									
Antenna Type	Ring Focus/Cassagrain									
Surface Accuracy (RMS)	≤0.5mm									
Reflector Construction	16 precision-formed aluminum panels with heat-diffusing white paint, Hot spray galvanized back structure.									
Mount type	Kingpost pedestal									
Antenna Pointing Range	Azimuth		Elevation		Polarization		Turn table			
Drive Mode	Motorized									
Motor Drive System	Azimuth Travel Rate		Elevation Travel Rate		Polarization Travel Rate		0.003°-0.3°/S 0.003°-0.3°/S 1°/S			
Environmental Specification										
Operational Wind	79km/h gusting to 126km/h									
Survival Wind	200km/h(at zenith)									
Temperature	-40°~+60°									
Relative Humidity	100%									
Solar Radiation	1135Kcal/h/m ²									
Seismic(Survival)	0.3g(H), 0.15g(V)									
Ice Loading	13mm Operational; 25mm Survival									